Shaw-Perkins

the security specialist, has the solution to your vandalism problems with a complete line of full-security metal guards

Model HSV

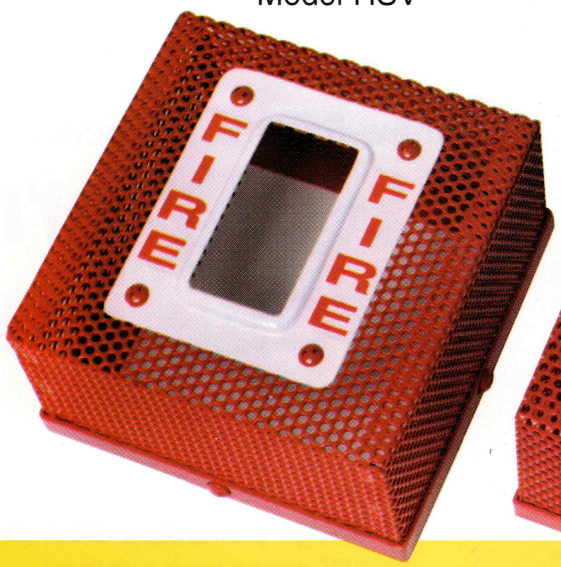

Model HSH

Shaw-Perkins Protection

Steel Horn/ Strobe Guards

- **Constructed of heavy-gauge die-formed steel**
  To prevent damage to the Horn/Strobe unit due to vandalism.
- **High impact clear acrylic lenses**
- **Installs Easily**
  Installs over your existing Horn/Strobe unit without removing the device. Can be installed over existing exposed conduit (Special mounting frame required).
- **Variety of Models and Sizes**
  Fits your present Horn/Strobe unit (For sizes not listed, contact factory).
- **Keeps your fire alarm system working**

Shaw-Perkins Protection

Steel Horn/ Strobe Guards

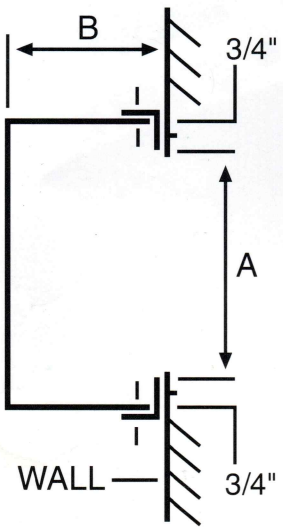

Dim. A *Denotes max. height and width Horn/Strobe size that will fit inside guard frame for any given model.*

Dim. B *Denotes depth of Horn/Strobe Guards.*

Model No.	Height	Width	Depth
HSV-664	6”	6”	4”
HSH-664	6”	6”	4”
HSV-663	6”	6”	3”
HSH-663	6”	6”	3”

Cover

16 Gauge perforated steel (3/16”dia. perforations on 1/4” staggered centers).

Frame

14 Gauge solid steel.

Installation

Use frame as a guide to drill into wall, Use 1/4”min. hex head bolts with lead expansion, shields or toggle bolts. Avoid plastic shields, Place cover into frame; secure with 4 fasteners.

All guards are supplied with the following:

1. Guards fasten to mounting frame with No. 10/24 X 3/8” long tamper proof screws. Tools available at extra cost.
2. Standard: Red and white baked enamel finish.
3. Replacement lenses available at extra cost.

Important:
Strength of final installation requires heavy, solid anchoring.

More quality, heavy-duty protection from:

Shaw-Perkins

Division of REMACOR
205 West Washington Street • P.O.Box 1486 • New Castle, PA 16103
• 412-654-1162 • FAX 412-654-1850